

A

12-08-99

NEW UNITED STATES UTILITY PATENT APPLICATION
under 37 C.F.R. 1.53(b)

Page 1

Atty. Docket No. 3797.80027

12/07/99
jc654 U.S. PTO

CERTIFICATE OF EXPRESS MAILING UNDER 37 C.F.R. § 1.10: The undersigned hereby certifies that this United States Patent Application and all papers noted herein as being attached, are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" Service under 37 C.F.R. § 1.10 today, **December 7, 1999**, and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

Express Mail Label No.: EM461380201US

jc688 U.S. PTO
09/456127
12/07/99

Assistant Commissioner for Patents
Box Patent Applications
Washington, D.C. 20231

Enclosed herewith is a new patent application and the following papers:

First Named Inventor (or application identifier): **Andrew Baird**

Title of Invention: **BOOKMARKING AND PLACEMARKING A DISPLAYED DOCUMENT IN A COMPUTER SYSTEM**

1. ☒ Specification 26 pages (including specification, claims, abstract) / 44 claims (5 independent)
2. ☒ Declaration/Power of Attorney is:
☒ attached in the regular manner.
☐ NOT included, but deferred under 37 C.F.R. § 1.53(f).
3. ☒ 8 Distinct sheets of ☒ Formal ☐ Informal Drawings
4. ☐ Preliminary Amendment.
5. ☐ Information Disclosure Statement
☐ Form 1449
☐ A copy of each cited prior art reference
6. ☐ Assignment with Cover Sheet.
7. ☐ Priority is hereby claimed under 35 U.S.C. § 119 based upon the following application(s):

Country	Application Number	Date of Filing (day, month, year)

8. ☐ Priority document(s).

NEW UNITED STATES UTILITY PATENT APPLICATION
under 37 C.F.R. 1.53(b)

Page 2

Atty. Docket No. 3797.80027

9. ☐ Statement Claiming Small Entity Status.
10. ☐ Microfiche Computer Program (Appendix).
11. ☐ Nucleotide and/or Amino Acid Sequence Submission.
☐ Computer Readable Copy.
☐ Paper Copy (identical to computer copy).
☐ Statement verifying identity of above copies.

12. Calculation of Fees:

FEES FOR	EXCESS CLAIMS	FEE	AMOUNT DUE
Basic Filing Fee (37 C.F.R. § 1.16(a))			
			\$760.00
Total Claims in Excess of 20 (37 C.F.R. § 1.16(c))	24	18.00	\$432.00
Independent Claims in Excess of 3 (37 C.F.R. § 1.16(b))	2	78.00	156.00
Multiple Dependent Claims (37 C.F.R. § 1.16(d))	0	260.00	
Subtotal - Filing Fee Due			\$1,348.00
	MULTIPLY BY		
Reduction by 50%, if Small Entity (37 C.F.R. §§ 1.9, 1.27, 1.28)	0		
TOTAL FILING FEE DUE			\$1,348.00
Assignment Recordation Fee (if applicable) (37 C.F.R. § 1.21(h))	0	40.00	
GRAND TOTAL DUE			\$1,348.00

13. PAYMENT is:

- ☒ included in the amount of the GRAND TOTAL by our enclosed check. A general authorization under 37 C.F.R. § 1.25(b), second sentence, is hereby given to credit or debit our Deposit Account No. 01-0850 for the instant filing and for any other fees during the pendency of this application under 37 C.F.R. §§ 1.16, 1.17 and 1.18.
- ☐ not included, but deferred under 37 C.F.R. § 1.53(f).

14. All correspondence for the attached application should be directed to:

Banner & Witcoff, Ltd.
1001 G. Street, N.W., Suite 1100
Washington, D.C. 20001-4597
Telephone: (202)508-9100
Facsimile: (202) 508-9299


NEW UNITED STATES UTILITY PATENT APPLICATION
under 37 C.F.R. 1.53(b)

Page 3

Atty. Docket No. 3797.80027

15. Other: _____

Date: December 7, 1999

By: 
Christopher P. Moreno
Reg. No. 38,566

CPM/kap

662027 12/7/99

BOOKMARKING AND PLACEMARKING A DISPLAYED DOCUMENT IN A COMPUTER SYSTEM

Technical Field

5 The present invention relates generally to the electronic display of documents and, in particular, to the use of bookmarks and placemarks in electronically displayed documents.

Background Of The Invention

10 Many factors today drive the development of computers and computer software. One of these factors is the desire to provide accessibility to information virtually anytime and anywhere. The proliferation of notebook computers, personal digital assistants (PDAs) and other personal electronic devices reflect the fact that users want to be able to access information wherever they may be, whenever they want. In order to facilitate greater levels of information accessibility, the presentation of information must be made as familiar and comfortable as possible.

15 In this vein, one way to foster success of electronic presentations of information will be to allow users to handle information in a familiar manner. Stated another way, the use and manipulation of electronically-presented information may mimic those paradigms that users are most familiar with, e.g., printed documents, as an initial invitation to their use. As a result, greater familiarity between users and their "machines" will be engendered, thereby fostering greater
20 accessibility, even if their capabilities are richer and more extensive than what the user is already familiar with. Once users feel comfortable with new electronic presentations, they will be more likely to take advantage of an entire spectrum of available functionality.

25 One manner of encouraging familiarity is to present information in an electronic book format in which a computer displays information in a manner that closely resembles printed books. In order to more completely mimic a printed book, users will need to have the ability to mark pages in a manner similar to today. Users will want to mark certain pages so that they can return to them later, i.e., to create bookmarks. Additionally, users will want to mark pages where they last left off reading a book, i.e., to create placemarks.

Current technology fails to accurately reproduce the use of bookmarks and placemarks as known in printed books. For example, the "NETSCAPE NAVIGATOR" web browser provides a function called "Bookmarks" that allows a user to store the identity of a given web page for later recall. The "INTERNET EXPLORER" web browser provides a similar function called "Favorites".

5 However, these functions only provide the ability to return to a given web page that will typically comprise a substantial amount of information that cannot be viewed on a single computer screen. As a result, the user must scroll down the web page to access a certain part of the web page. Furthermore, the "bookmarks" provided in this manner are not visually represented in conjunction with the "documents" that they mark.

10 Additionally, word processing software is known to provide marking ability. For example, "WORDPERFECT" word processor software allows a user to insert a "bookmark" into a document. The user can later select the bookmark from a list of bookmarks and have the display return to the point in the document where the bookmark was inserted. Again, however, this method of bookmarking fails to provide any visual indicator along with the document itself.

15 Finally, "EXCEL" spreadsheets are known to provide visible "tabs" which uniquely identify various "sheets" within a file. However, the location and appearance of these tabs is not controllable by the user.

20 Thus, it would be advantageous to provide a technique for creating, using and removing bookmarks and placemarks in electronic documents. Such a technique should provide a visual indicator where appropriate and should provide flexibility in defining parameters that control the marks.

Summary of The Invention

25 The present invention provides a technique for bookmarking and/or placemarking an electronic document. In the context of the present invention, a "document" encompasses all forms of electronically displayable information that require more than a single screen to be fully displayed. To create a bookmark, a user selects a desired part of a document to be marked. In response to the user's selection, a visual indicator is displayed along with the desired part of the document. Concurrently, a bookmark object is preferably created in a user space apart from the document being

bookmarked. The bookmark object comprises information linking the bookmark object to the desired part of the document. Additionally, the bookmark object comprises user-modifiable display, labeling and other properties that control the manner in which the visual indicator behaves. If another part of the document is subsequently displayed in place of the desired part of the document, at least a portion of the visual indicator is still displayed. Later selection of the portion of the visual indicator will cause the desired portion of the document to be re-displayed.

A placemark is created whenever the display of a current document is discontinued, i.e., by closing the document or navigating away from the document. In response to a discontinuation signal corresponding to the document currently being displayed, a placemark object comprising information linking the placemark object to a last-viewed part of the document is created. The placemark object is preferably created in a user space apart from the document being placemarked. If the placemarked document is subsequently selected for re-display, the last-viewed part of the document is initially re-displayed based on the information linking the placemark object to the document.

Brief Description of the Drawings

FIG. 1 is a schematic block diagram of a conventional general-purpose digital computing environment that may be used to implement various aspects of the present invention;

FIG. 2 illustrates an exemplary electronic display and a document displayed therein in accordance with the present invention;

FIG. 3 illustrates exemplary features of bookmarks provided in accordance with the present invention;

FIG. 4 illustrates further exemplary features of bookmarks provided in accordance with the present invention;

FIG. 5 is a schematic block diagram illustrating a bookmark object and its relationship to a document in accordance with the present invention;

FIG. 6 is a schematic block diagram illustrating a placemark object and its relationship to a document in accordance with the present invention;

FIG. 7 is a flowchart illustrating a method for the creation, use and removal of a bookmark in accordance with the present invention;

FIG. 8 is a schematic block diagram of an implementation of the present invention based on a computer-readable medium;

5 FIG. 9 is a flowchart illustrating a method for the creation, use and removal of a placemark in accordance with the present invention; and

FIG. 10 is a schematic block diagram of another implementation of the present invention based on a computer-readable medium.

Detailed Description of the Invention

10 The present invention may be more fully described with reference to FIGS. 1-10. FIG. 1 is a schematic diagram of a conventional general-purpose digital computing environment (including handheld computing devices) that can be used to implement various aspects of the invention. Computer 100 includes a processing unit 110, a system memory 120 and a system bus 130 that
15 couples various system components including the system memory to the processing unit 110. System bus 130 may be any of several types of bus structures including a memory bus or memory controller, a peripheral bus, and a local bus using any of a variety of bus architectures. System memory 120 includes a read only memory (ROM) 140 and a random access memory (RAM) 150.

20 A basic input/output system (BIOS) 160 containing the basic routines that help to transfer information between elements within the computer 100, such as during start-up, is stored in ROM 140. Computer 100 also includes a hard disk drive 170 for reading from and writing to a hard disk (not shown), a magnetic disk drive 180 for reading from or writing to a removable magnetic disk 190, and an optical disk drive 191 for reading from or writing to a removable optical disk 192, such as a CD ROM or other optical media. Hard disk drive 170, magnetic disk drive 180, and optical disk
25 drive 191 are respectively connected to the system bus 130 by a hard disk drive interface 192, a magnetic disk drive interface 193, and an optical disk drive interface 194. The drives and their associated computer-readable media provide nonvolatile storage of computer readable instructions, data structures, program modules and other data for personal computer 100. It will be appreciated by those skilled in the art that other types of computer readable media which can store data that is

accessible by a computer, such as magnetic cassettes, flash memory cards, digital video disks, Bernoulli cartridges, random access memories (RAMs), read only memories (ROMs), and the like, may also be used in the exemplary operating environment. It is anticipated that a handheld device implementing this invention would typically have only one mass storage peripheral, either a micro
5 hard disk or else flash memory or equivalent.

A number of program modules can be stored on the hard disk, magnetic disk 190, optical disk 192, ROM 140 or RAM 150, including an operating system 195, one or more application programs 196, other program modules 197, and program data 198. A user can enter commands and information into computer 100 through input or selection devices, such as a keyboard 101 and a
10 pointing device 102. The pointing device 102 may comprise a mouse, touch pad, touch screen, voice control and activation or other similar devices. Other input devices (not shown) may include a microphone, joystick, game pad, satellite dish, scanner, or the like. These and other input devices are often connected to the processing unit 110 through a serial port interface 106 that is coupled to the system bus, but may be connected by other interfaces, such as a parallel port, a game port or a
15 universal serial bus (USB). A monitor 107 or other type of display device is also connected to system bus 130 via an interface, such as a video adapter 108. In addition to the monitor, personal computers typically include other peripheral output devices (not shown), such as speakers and printers. Preferably, any implementation of the present invention is designed to be operable in a least case scenario only by touch, and does not always require the use of a keyboard or mouse. As
20 described in further detail below, a user may create a bookmark simply by touch, and accept the default labeling or modifies bookmark properties using touch techniques as well. But if he is using a device with keyboard, voice or handwriting recognition, for example, the user may use those input methods to create bookmarks and alter the properties of the bookmark.

Computer 100 can operate in a networked environment using logical connections to one or
25 more remote computers, such as a remote computer 109. Remote computer 109 typically includes at least some of the elements described above relative to computer 100, although only a memory storage device 111 has been illustrated in FIG. 1. The logical connections depicted in FIG. 1 include a local area network (LAN) 112 and a wide area network (WAN) 113. Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets and the

Internet It is anticipated that a handheld device used to implement the present invention would typically use a wireless LAN interface based on an infra-red or radio frequency communication link.

When used in a LAN networking environment, computer 100 is connected to local network 112 through a network interface or adapter 114. When used in a WAN networking environment, personal computer 100 and remote computer 109 may both include a modem 115 or other means for establishing a communications over wide area network 113, such as the Internet. Modem 115, which may be internal or external, is connected to system bus 130 via serial port interface 106. In a networked environment, program modules depicted relative to personal computer 100, or portions thereof, may be stored in the remote memory storage device.

It will be appreciated that the network connections shown are exemplary and other means of establishing a communications link between the computers can be used. The existence of any of various well-known protocols, such as TCP/IP, "ETHERNET", FTP, HTTP and the like, is presumed, and the system can be operated in a client-server configuration to permit a user to retrieve web pages from a web-based server. For example, in an embodiment of the present invention, the remote computer 109 is a server having stored thereon one or more documents that may be accessed by the computer 100.

FIG. 2 illustrates an electronic display 201 in accordance with the present invention. A computer monitor provides the display 201, sometimes referred to as a "screen". As shown in FIG. 2, the display 201 can be used to display a document 203. Various parts 205, 207 of the document 203 are also displayed; in this case, pages 12 and 13 of the document. Although the document 203 depicted in FIG. 2 is displayed in a book-like format, other display formats could also be provided. Each part of the document further comprises a predetermined region 209. In the example shown, the predetermined region 209 is a page margin, although other portions of the page could be designated as a predetermined region for the purposes of the present invention. In the context of the present invention, the selection of any point within a predetermined region 209 will initiate the creation of a bookmark, as described below.

Additionally, a cursor 211 is shown. Positioning of the cursor 211 is controlled by a pointing device such as a mouse, touch pad, touch screen or similar devices. Although the cursor 211 is not required to practice the present invention, it is shown to illustrate the ability of a user

to select various points and elements rendered on the display 201. For example, where a mouse controls the cursor 211, the user would maneuver the mouse until the cursor 211 points to a user-selected point 213 within the predetermined region 209. As known in the art, by "clicking" the mouse while the cursor 211 is pointing to the point 213, a selection signal is generated indicating that the user has selected the point 213. Alternatively, where a touch screen is used, a user need not control a position of a cursor, but may instead simply "tap" the screen at the selected point 213 in order to generate the selection signal. Regardless of the method used, the selection signal generated in this manner can be used to create a bookmark as described in greater detail below.

Referring now to FIG. 3, it is assumed that a selection signal has been generated corresponding to the user-selected point 213. In response to the selection signal, a visual indicator 301 is now displayed along with the desired part of the document, i.e., as an overlay. In one embodiment of the present invention, the visual indicator 301 is positioned at the user-selected point 213. That is, the visual indicator 301 can be centered directly over the user-selected point 213, or merely vertically aligned with the user-selected point 213 and at a predetermined horizontal position. Alternatively, the visual indicator could be automatically positioned in response to the selection signal based on the existence of other visual indicators currently being displayed. In the example illustrated in FIG. 3, another visual indicator 305 is shown. If the selection signal would result in the new visual indicator 301 being displayed so as to obscure the other visual indicator 305, the computer currently rendering the display could automatically position the new visual indicator 301 away from the other visual indicator 305, or at least to minimize the amount of the other visual indicator 305 that would be hidden by the new visual indicator 301. Furthermore, although the visual indicators depicted in FIGS. 3 and 4 are shown along the top margin, they may be equally displayed virtually anywhere relative to the document being displayed. In one embodiment, the visual indicators are displayed along a vertical edge of the document being displayed, with the particular position of each bookmark in the document being signified by the vertical ordering of the visual indicators. For example, the uppermost visual indicator corresponds to a bookmark occurring at the lowest page in the document, and the bottommost visual indicator corresponds to a bookmark occurring at the highest page in the document, or vice versa. Other techniques, such as relative or increasing shading applied to the

visual indicators, may be also used to signify positions within the document and are readily designed by those having ordinary skill in the art.

Each visual indicator may also comprise information identifying the desired part of the document that has been bookmarked. For example, the visual indicator 301 corresponding to the
5 desired part of the document identified as “page 13” includes information 303 that identifies the part of the document marked by the visual indicator 301. The information identifying the desired part of the document can be automatically generated by the computer system, for example, using a page number, the first few words on the page or similarly useful information. The present invention also allows a user to enter a title or textual content 309 that can be displayed in place of, or in addition
10 to, the information 303.

FIG. 3 also illustrates the ability to select different shapes of visual indicators used to represent bookmarks. For example, visual indicators could default to a rectangular shape as shown by those visual indicators identified by reference numerals 301 and 307. An alternative rounded shape is depicted for the visual indicator identified by reference numeral 305. Of course, a wide
15 variety of shapes could be used limited only by design considerations and system resources.

Once a bookmark (as represented by its corresponding visual indicator) has been created, a user may access a different part of that document and later use the bookmark to return to the previously bookmarked part. For example, if a user selects the portion of the visual indicator having reference numeral 305, that part of the document marked by that bookmark will be displayed as
20 shown in FIG. 4. Note that the selected visual indicator 401 is subsequently displayed in full when its corresponding part of the document is displayed. In contrast, the visual indicators 403, 405 corresponding to other parts of the document that were previously bookmarked are now only partially displayed, as shown.

As used in the context of the present invention, the “desired part of the document” generally
25 encompasses that portion of the document, proximate the bookmark, capable of display on a single computer screen. For example, some document may include predefined internal boundaries, such as pages, which correspond to display boundaries when the document is being displayed. This is illustrated in FIGS. 2-4. In this case, the internal boundaries encompassing the bookmark delimit the extent of the desired part of the document. Other documents, such as web pages, may not

necessarily include such internal boundaries. In this case, “the desired part of the document” comprises those portions of the document capable of being simultaneously displayed with the bookmark. For example, where a web page is marked, the desired part of the document includes those portions of the web page that are viewable so long as the visual indicator of the bookmark is likewise viewable.

The present invention also provides for the manipulation of user-modifiable properties. User-modifiable properties are any parameters that may be modified by a user that affect the appearance of visual indicators, or in any way control the operation of bookmarks in accordance with the present invention. For example, FIG. 4 illustrates a context menu 407 comprising a variety of exemplary menu selections applicable to a selected visual indicator 401. Access to the context menu 407 is provided using known techniques, such as using a predefined mouse button. Other techniques for displaying and manipulating a context menu (e.g., touch screens, voice control and activation, etc.) may also be used.

The menu selections correspond to properties that may be modified by a user or actions that may be taken by the user relative to the selected visual indicator 401. As mentioned above, the present invention allows a user to select a shape, title or textual content for a given visual indicator. A variety of other properties of the selected visual indicator may also be manipulated, including color, size, texture, font, and placement. The context menu also comprises menu selections allowing a user to perform certain actions relative to the selected visual indicator, such as deleting the visual indicator and specifying default settings. The user may even wish to add links to other locations in this or other documents as part of a bookmark. Other suitable properties and actions may be evident to those having ordinary skill in the art, and the present invention is not limited in this regard by those properties and action listed above.

FIGS. 5 and 6 illustrate the relationship of a bookmark object and a placemark object, respectively, to a document in accordance with the present invention. In particular, both FIG. 5 and FIG. 6 show a computer 501 and remote computer 503 that may comprise computers in accordance with the computer 100 shown in FIG. 1. Each computer 501, 503 comprises memory 505, 507 as known in the art. As described in greater detail below, a bookmark object 509 is created each time a bookmark is added to a document. Similarly, a placemark object 601 is created whenever a

placemark is added to a document. A bookmark or placemark “object” in the context of the present invention comprises at least a computer-readable data structure stored on one or more electronic storage devices.

In the example shown, the memory 507 of the remote computer 503 comprises at least one electronic document 519. Although it is possible to store the bookmark/placemark objects in the same storage device as the document(s) being marked, bookmark and placemark objects are preferably created in a user space apart from the document being marked. This is illustrated in FIGS. 5 and 6 where the bookmark object 509 and placemark object 601 are resident in a computer apart from the document 519 being marked. The “user space” used to store the bookmark and/or placemark objects is not restricted to any particular physical configuration, such as memory resident on a single computer. A “user space” encompasses any electronic storage device or devices that is (are) capable of storing a bookmark/placemark object and that is accessible by a given user. Thus, conventional storage devices such as floppy disks, memory cards, etc. may be used in addition to hard drives to store the bookmark/placemark objects. Although it is preferred that the user space be separate from the storage device used to store the document, the present invention does not preclude the user space and the document storage device being resident on the same computer. Referring to FIGS. 5 and 6, this would be the case where the memory 507 storing the document 519 is resident in the computer 501, separate but in addition to the memory 505 storing the bookmark/placemark object 509, 601. For example, the document 519 could be stored on a memory card plugged into a user’s computer, with the bookmark object 509 residing in local memory.

The bookmark object 509 comprises information 511 identifying the desired part of the document being marked. As discussed above, this information can be, for example, a page number or the first few words displayed in the desired part of the document or a default identification assigned when the bookmark object 509 is created. Regardless of its particular form, the identifying information allows the computer displaying the document to properly manage the display of the visual indicator representative of the bookmark object, e.g., when the desired part is not being displayed, displaying only a portion of the corresponding visual indicator.

The bookmark object 509 also comprises user-modifiable properties 513, discussed above. When the bookmark object 509 is initially created, the properties 513 are preferably initialized to

a default set of values. The default values can be subsequently modified using techniques similar to those described above.

The bookmark object 509 further comprises information 515 linking the bookmark object 509 to the document being marked. Suitable linking information 515 comprises any information that is used to persistently link two or more objects across storage device, computer and/or network boundaries, as known in the art. The information 515 linking the bookmark object 509 may comprise, for example, a hyperlink or similar mechanism that uniquely identifies the document being marked and, preferably, the particular part (i.e., page, screen, line number, chapter, paragraph number, etc.) of the document being marked. Although it is not preferred, the bookmark object 509 could be stored integrally as part of the document being marked, thereby eliminating the need for the linking information 515 altogether. Storing bookmarks separately from the document allows users to bookmark information that they have no ability to modify—for example, bookmarking a document that is stored on a CD ROM, or content stored on a website. Externally stored bookmarks can also be shared with other users so that, for example, when a first user mails another user the first user's "copy" of a book (in fact a link to the book), copies of the first user's personal bookmarks can be sent as well so that the receiving user can see the first user's bookmarks. Furthermore, external storage of bookmarks may also allow the user to select (i.e., to examine and/or sort) bookmarks from an index or list of bookmarks in different ways according to selection criteria encompassing various properties of the bookmarks. For example, a user may choose to view/sort all bookmarks from a certain document, all bookmarks created on a certain day, all bookmarks where the user entered non-default text, etc. Techniques for examining and sorting data such as a list of bookmarks are well known in the art.

The placemark object 601 is similar in structure to the bookmark object 509 except that it does not include anything analogous to the user-modifiable properties 513. The linking information 605 is equivalent in function and structure to its counterpart described above relative to the bookmark object 509. Although structurally similar to its counterpart in the bookmark object 509, the identifying information 603 instead corresponds to a last-viewed part of the document, i.e., that part of the document that was being displayed when an indication was received that the document is to no longer be displayed. The "last-viewed part of the document", similar to the "desired part of

the document”, generally encompasses that portion of the document, proximate the placemark, capable of display on a single computer screen. As such, the discussion provided above regarding the presence or absence of internal boundaries within the document equally applies in the context of the last-viewed part of the document. The manner in which bookmark objects and placemark objects are created, used and removed is substantially different, as discussed below with regard to FIGS. 7-10.

FIG. 7 is a flow chart illustrating the operation of bookmarks in accordance with the present invention. The method of FIG. 7 can be executed as steps on a computer, such as the computer 100 shown in FIG. 1, using well-known programming techniques. At step 701, a selection signal is received that indicates a desired part of a document being displayed that a user wishes to bookmark. As described above, a variety of ways exist for providing such a selection signal, and it is not critical to the operation of the present invention. In response to the selection signal, at step 702, a visual indicator is rendered on the display that is currently displaying the document being marked. At step 703 and substantially contemporaneously with step 702, a bookmark object is also generated. Techniques for rendering visual indicators and generating objects as required by the present invention are well-known in the art and are not described in further detail here. The visual indicator of step 702 is representative of and logically linked to the bookmark object of step 703; together, the visual indicator and bookmark object provide the bookmark functionality of the present invention. As noted above, the bookmark object created at step 703 is preferably initialized such that the user-modifiable properties comprise default values. Such default values may be “hard coded” or adjustable by a user. Regardless, a user may optionally alter the display properties at step 704 using a context menu or similar mechanism, as described above.

As described above, the processing of steps 702 and 703 occurs automatically in response to the selection signal. However, it is anticipated that reception of the selection signal may actually be a precursor to any of a number of possible user actions, with the establishment of a bookmark being but one of the several possible actions. For example, the user may wish to annotate the document using another method other than bookmarks. In this case, before steps 702 and 703 are carried out, the user is first presented with a choice of which action they would like to perform.

Steps 702 and 703 would then be executed after the user has elected to create a bookmark based on his selection signal.

After the bookmark has been created, a user at any time (while the document continues to be displayed) may elect, at step 705, to display another part of the document, for example, by selecting another page. If another part of the document is to be displayed, processing continues at step 706 where at least a portion of the visual indicator (created at step 702) continues to be displayed even though the other part of the document is now being displayed. This is illustrated in FIG. 3 by those visual indicators having reference numerals 305 and 307 and in FIG. 4 by those visual indicators having reference numerals 403 and 405.

At step 707, it is determined if another selection signal has been received indicating the selection of the portion of the visual indicator being displayed as a result of step 706. Referring again to FIG. 3, for example, such a selection signal would be received if a user were to select visual indicator having reference numeral 305, corresponding to the user's desire to now display that part of the document, i.e., page 27. In response to the selection signal received at step 707, the desired part of the document that was marked at steps 701-703 is re-displayed at step 708. Continuing with the previous example and referring now to FIG. 4, the desired part of the document (page 27) is now displayed after its corresponding visual indicator was selected. Processing thereafter continues at step 705.

Steps 709 and 710 may be executed substantially contemporaneously with steps 705-708. At step 709, it is determined whether a removal signal corresponding to a bookmark has been received. Using the selection device in a manner similar to that described above (e.g., activating the display of a context menu using a mouse and cursor, touch screen, voice activation, etc.), the removal signal corresponds to a given bookmark as defined by its visual indicator and bookmark object. A removal signal manifests a user's desire to remove a bookmark from a document. Thus, at step 710, the corresponding visual indicator is removed and the bookmark object is eliminated responsive to the removal signal. Once again, techniques for removing a visual indicator and eliminating an object are well-known and are not described in further detail herein.

An implementation of the bookmarking functionality of the present invention is schematically illustrated in FIG. 8. In particular, a computer-readable medium 800 (such as RAM,

ROM, floppy disc, memory card, etc.) comprising a receiver component 801, a display component 802, a generating component 803 and a removal component 804 is shown. Each of the components preferably comprises computer-executable instructions. As those having ordinary skill in the art will readily appreciate, various other component arrangements can be devised that encompass the same
5 functionality.

The receiver component 801 takes as input the selection signals and removal signals described above and routes them to the appropriate components. Thus, a selection signal reflecting a user's desire to create a bookmark is routed to the display component 802 and generating component 803 resulting in a visual indicator and bookmark object, respectively. Likewise, a
10 selection signal corresponding to a portion of a visual indicator is routed to the display component 802, thereby causing a previously-marked portion of the document to be displayed. Removal signals are routed to the removal component 804 that causes, in turn, the visual indicator to be removed (depicted by the control connection 805) and the bookmark object to be eliminated.

FIG. 9 is a flow chart illustrating the operation of placemarks in accordance with the present
15 invention. The method of FIG. 9 can be executed as steps on a computer, such as the computer 100 shown in FIG. 1, using well-known programming techniques. At step 901, a discontinuation signal is received. For example, a user may close the currently-displayed document or reduce it to an iconic representation. Further still, a user may simply navigate to a different document while leaving the currently-displayed documents open. Regardless, the discontinuation signal indicates that a
20 currently-displayed document is to no longer be displayed, or is to be obscured partially or entirely in the display. In response to the discontinuation signal, at step 902, a placemark object comprising information identifying a last-viewed part of the document is generated. Techniques for generating objects as required by the present invention are well-known in the art and are not described in further detail here. As noted above, the bookmark object created at step 902 comprises information linking
25 the placemark object to the document being marked, as well as information identifying the last-viewed part of the document.

After the placemark has been created, a user at any time may cause a display request signal to be received at step 903. The display request signal corresponds to the document that was previously displayed and is essentially the inverse of the discontinuation signal. That is, the display

request signal indicates that the previously-closed document is being re-opened and re-displayed, or expanded from an iconic representation. Alternatively, the display request signal can indicate that a document that was previously obscured is now being displayed without any portion hidden. Regardless, if the display request signal is received, then, at step 904, the last-viewed part of the document (identified by the placemark object) is displayed.

Also, at step 905, the placemark object may be optionally eliminated no earlier than the step of the last-viewed part of the document being re-displayed. Elimination of the placemark object need not be performed automatically when the last-viewed part is re-displayed. For example, the placemark object may be retained so long as nothing other than the last-viewed portion of the document is displayed before the document is again closed or otherwise subject to another discontinuation signal. Stated another way, the placemark object may be eliminated only when another part of the document (other than the last-viewed part) is displayed after the document has been re-displayed. Once again, techniques for eliminating an object are well-known and are not described in further detail herein.

An implementation of the placemarking functionality of the present invention is schematically illustrated in FIG. 10. In particular, a computer-readable medium 1000, such as RAM, ROM, floppy disc, memory card, etc. comprising a receiver component 1001, a generating component 1002, a display component 1003 and a removal component 1004 is shown. Each of the components preferably comprises computer-executable instructions. As those having ordinary skill in the art will readily appreciate, various other component arrangements can be devised that encompass the same functionality.

The receiver component 1001 takes as input the discontinuation signals and display request signals described above and essentially re-routes them to the appropriate components. Thus, a discontinuation signal reflecting the need to create a placemark is routed to the generating component 1002 resulting in a placemark object. Likewise, a display request signal corresponding to a document previously subject to a discontinuation signal is routed to the display component 1003, thereby causing a last-viewed portion of the document to be re-displayed. Additionally, the display request signal is also routed to the removal component 1004 that causes, in turn, the placemark object to be eliminated.

What has been described is merely illustrative of the application of the principles of the present invention. Other arrangements and methods can be implemented by those skilled in the art without departing from the spirit and scope of the present invention.

Claims

What is claimed is:

1. In a computer system having a graphical user interface including a display and a selection
5 device, a method of bookmarking a document rendered on the display, the method comprising steps of:

receiving a first selection signal indicative of the selection device pointing to a desired
part of the document; and

responsive to the first selection signal, displaying a visual indicator representative of a
10 bookmark with the desired part of the document.

2. The method of claim 1, wherein the first selection signal is indicative of the selection
device pointing to a predetermined region of the desired part of the document.

15 3. The method of claim 2, wherein the first selection signal is indicative of the selection
device pointing to a user-selected point within the predetermined region, and wherein the visual
indicator is displayed at the user-selected point.

20 4. The method of claim 1, wherein the visual indicator comprises information identifying
the desired part of the document.

5. The method of claim 1, further comprising a step of:
displaying information regarding at least the bookmark based on properties of
bookmarks.
25

6. The method of claim 5, further comprising a step of:
displaying a list comprising information regarding a plurality of bookmarks based on
user-selected ones of the properties of bookmarks.

7. The method of claim 1, further comprising a step of:
responsive to the selection signal, generating a bookmark object represented by the visual indicator.

5 8. The method of claim 7, wherein the bookmark object is generated within a user space separate from the document.

9. The method of claim 7, wherein the bookmark object comprises information linking the bookmark object to the desired part of the document.

10

10. The method of claim 7, wherein the bookmark object comprises user-modifiable properties corresponding to the visual indicator.

15

11. The method of claim 10, wherein the user-modifiable properties comprise information defining at least one of: a color of the visual indicator, a shape of the visual indicator, a size of the visual indicator, a placement of the visual indicator, a font of the visual indicator, a title of the visual indicator and textual content of the visual indicator or links to other locations.

20

12. The method of claim 7, further comprising steps of:
receiving a removal signal corresponding to the visual indicator; and
responsive to the removal signal, removing, from the display, the visual indicator and eliminating the bookmark object.

25

13. The method of claim 1, further comprising steps of:
displaying another part of the document and, while the other part of the document is being displayed, displaying at least a portion of the visual indicator.

14. The method of claim 13, further comprising steps of:
receiving a second selection signal indicative of the selection device pointing to the at

least the portion of the visual indicator; and

responsive to the second selection signal, displaying the desired part of the document.

15. In a computer system having a graphical user interface including a display, a method of placemarking a document rendered on the display, the method comprising steps of:

receiving a discontinuation signal indicating that the document is to no longer be displayed on the display; and

5 responsive to the discontinuation signal, generating a placemark object comprising information identifying a last-viewed part of the document, wherein the last-viewed part of the document is being displayed when the discontinuation signal is received.

10 16. The method of claim 15, wherein the placemark object is generated within a user space separate from the document.

17. The method of claim 15, wherein the placemark object comprises information linking the placemark object to the last-viewed part of the document.

15 18. The method of claim 15, further comprising steps of:
receiving a display request signal indicating that the document is to be re-displayed on the display; and
responsive to the display request signal and based on the placemark object, re-displaying the last-viewed part of the document.

20 19. The method of claim 18, further comprising a step of:
no earlier than the step of re-displaying the last-viewed part of the document and responsive to the display request signal, eliminating the placemark object.

20. A computer-readable medium comprising computer-executable components for bookmarking a document rendered on a display, the computer-executable components comprising:

a receiver component that is capable of taking as input a first selection signal indicating selection of a desired part of the document; and

a display component that is capable of causing, in response to the first selection signal, a visual indicator to be displayed with the desired part of the document.

21. The computer-readable medium of claim 20, wherein the receiver component is capable of responding to the first selection signal indicating that the selection device is pointing to a predetermined region of the desired part of the document.

22. The computer-readable medium of claim 21, wherein the receiver component is capable of responding to the first selection signal indicating that the selection device is pointing to a user-selected point within the predetermined region, and wherein the display component is capable of causing the visual indicator to be displayed at the user-selected point.

23. The computer-readable medium of claim 21, wherein the display component is capable of causing the visual indicator to comprise information identifying the desired part of the document.

24. The computer-readable medium of claim 21, wherein the display component is capable of causing at least a portion of the visual indicator to be displayed while another part of the document is being displayed.

25. The computer-readable medium of claim 24, wherein the receiver component is capable of taking as input a second selection signal indicating the selection of the at least the portion of the visual indicator, and wherein the display component is capable of causing the desired part of the document to be displayed responsive to the second selection signal.

26. The computer-readable medium of claim 21 having further computer-executable components comprising:

a generating component that, responsive to the selection signal, is capable of creating a bookmark object represented by the visual indicator.

5

27. The computer-readable medium of claim 26, wherein the generating component is capable of creating the bookmark object within a user space separate from the document.

28. The computer-readable medium of claim 26, wherein the generating component is capable of providing, as part of the bookmark object, information linking the bookmark object to the desired part of the document.

10

29. The computer-readable medium of claim 26, wherein the generating component is capable of providing, as part of the bookmark object, user-modifiable properties corresponding to the visual indicator, the user-modifiable properties comprising information defining at least one of: a color of the visual indicator, a shape of the visual indicator, a size of the visual indicator, a placement of the visual indicator, a font of the visual indicator, a title of the visual indicator and textual content of the visual indicator.

15

30. The computer-readable medium of claim 26 having further computer-executable components comprising:

a removal component, responsive to a removal signal corresponding to the visual indicator, that is capable of removing, from the display, the visual indicator and that is capable of causing the bookmark object to be eliminated;

20

wherein the receiving component is capable of taking as input the removal signal.

25

31. A computer-readable medium comprising computer-executable components for placemarking a document rendered on a display, the computer-executable components comprising:

a receiver component that is capable of taking as input a discontinuation signal indicating that the document is to no longer be displayed on the display; and

a generating component that, responsive to the discontinuation signal, is capable of creating a placemark object, the placemark object comprising information identifying a last-viewed part of the document that is being displayed when the discontinuation signal is received.

32. The computer-readable medium of claim 31, wherein the generating component is capable of creating the placemark object within a user space separate from the document.

33. The computer-readable medium of claim 31, wherein the generating component is capable of providing, as part of the placemark object, information linking the placemark object to the last-viewed part of the document.

34. The computer-readable medium of claim 31 having further computer-executable components comprising:

a display component, responsive to a display request signal indicating that the document is to be re-displayed on the display, that is capable of causing the last-viewed part of the document to be re-displayed based on the placemark object;

wherein the receiver component is capable of taking as input the display request signal.

35. The computer-readable medium of claim 34 having further computer-executable components comprising:

a removal component that is capable of eliminating the placemark object responsive to the display request signal and no earlier than when the display component has caused the last-viewed part of the document to be re-displayed.

36. A computer-readable medium having stored thereon a data structure comprising:
a first data field comprising information linking the data structure to a document; and
a second data field comprising information identifying a part of the document being
marked by the data structure.

5

37. The computer-readable medium of claim 36, wherein the data structure is representative
of a bookmark, and the part of the document being marked comprises a desired part of the
document.

10 38. The computer-readable medium of claim 36, wherein the data structure is representative
of a placemark, and the part of the document being marked comprises a last-viewed part of the
document.

15 39. The computer-readable medium of claim 36, wherein the first data field comprises a
hyperlink.

40. The computer-readable medium of claim 36, further comprising:
a third data field comprising information regarding user-modifiable properties that control
behavior of a visual indicator corresponding to the data structure.

20

41. The computer-readable medium of claim 40, wherein the information regarding user-
modifiable properties comprises information defining at least one of: a color of the visual
indicator, a shape of the visual indicator, a size of the visual indicator, a placement of the visual
indicator, a font of the visual indicator, a title of the visual indicator and textual content of the
25 visual indicator or links to other locations.

42. The computer-readable medium of claim 36, wherein the document is stored on the
computer-readable medium.

43. A computer comprising the computer-readable medium of claim 36 and another computer-readable medium, wherein the document is stored on the other computer-readable medium.

- 5 44. A computer comprising the computer-readable medium of claim 36 and coupled to a remote computer-readable medium, wherein the document is stored on the remote computer-readable medium.

Abstract of the Invention

While viewing an electronically displayed document, a user creates a bookmark by selecting a desired part of a document to be marked. In response, a visual indicator is displayed and a bookmark object is created preferably separate from the document . The bookmark object comprises
5 information linking the bookmark object to the desired part of the document as well as user-modifiable properties. If another part of the document is subsequently displayed, at least a portion of the visual indicator is still displayed. Later selection of the portion of the visual indicator causes the desired portion of the document to be re-displayed. Because the object is separate from the document, it may be viewed and sorted by its properties apart from its display with the document.

- 10 A placemark is created whenever the display of a current document is discontinued. In response to a discontinuation signal, a placemark object comprising information linking the placemark object to a last-viewed part of the document is created. Subsequent selection of the document for re-display causes the last-viewed part of the document to be displayed.

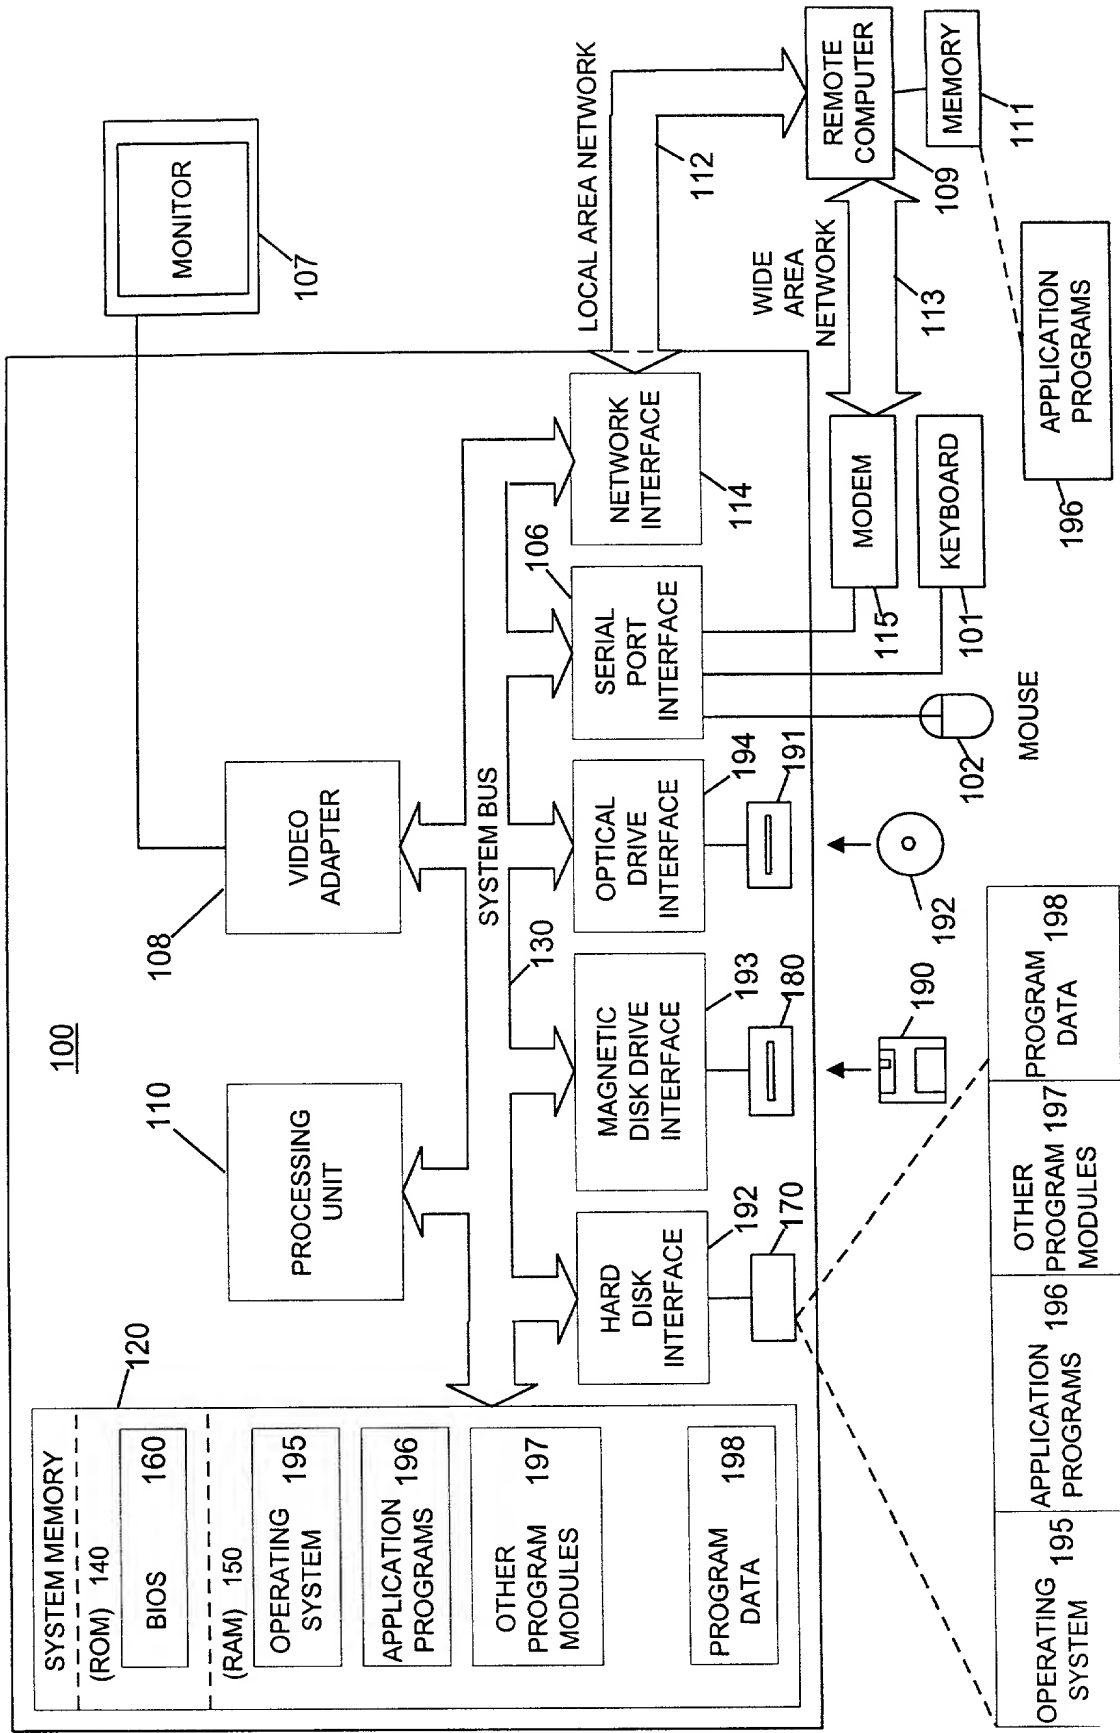


FIG. 1

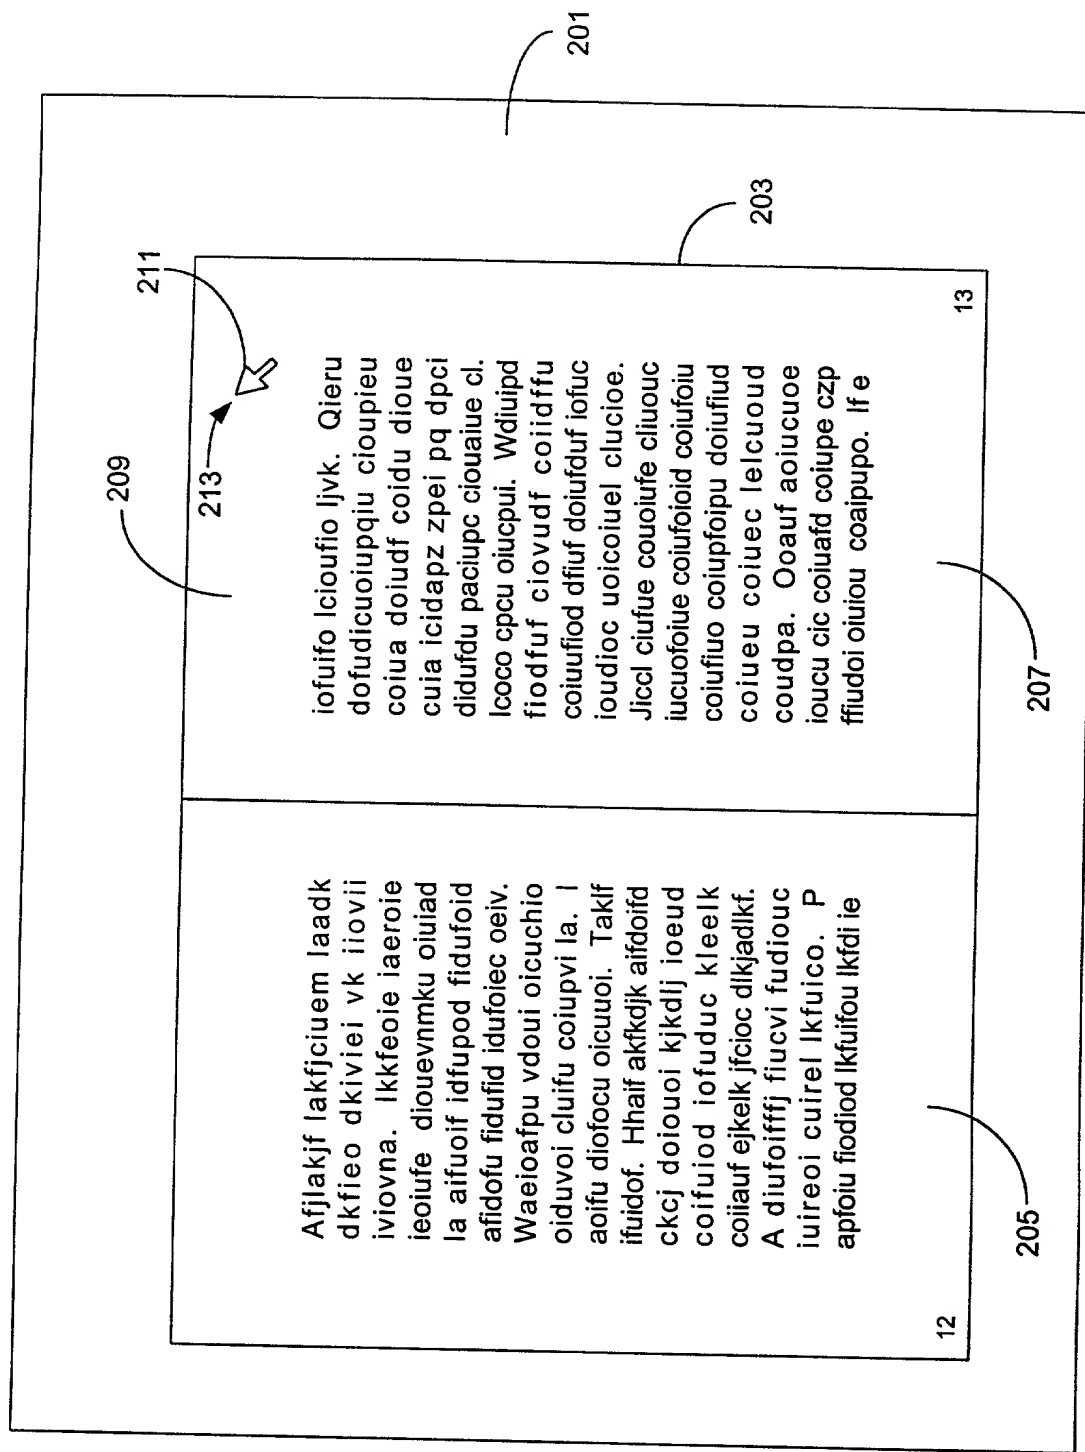
[illegible]

FIG. 2

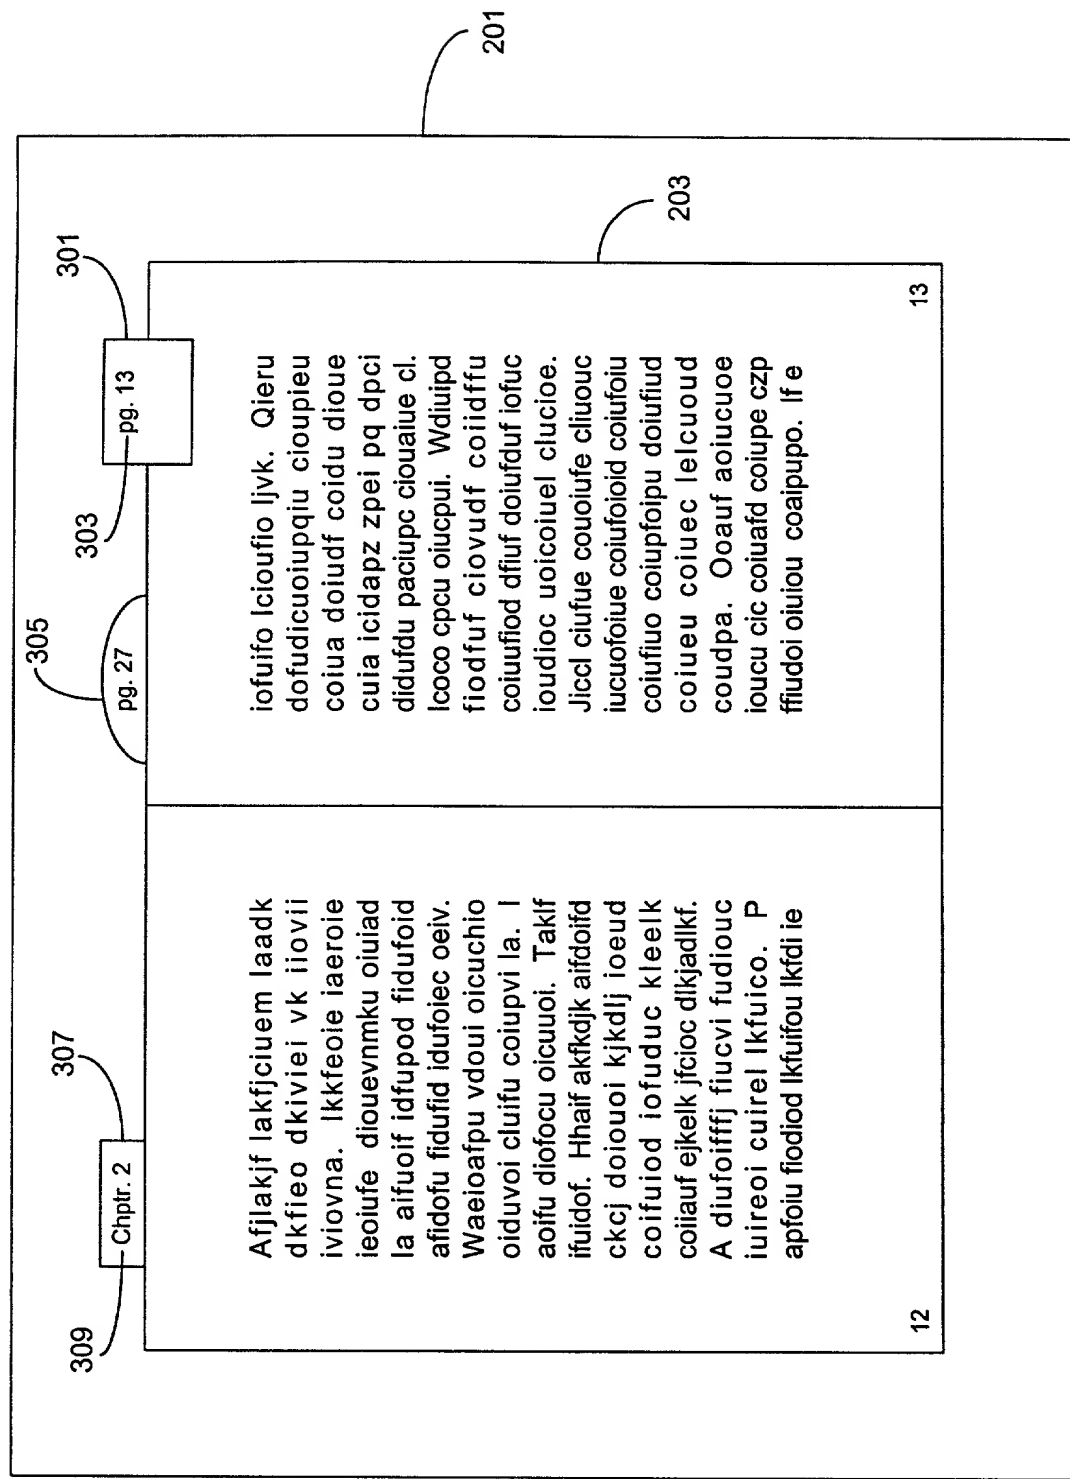


FIG. 3

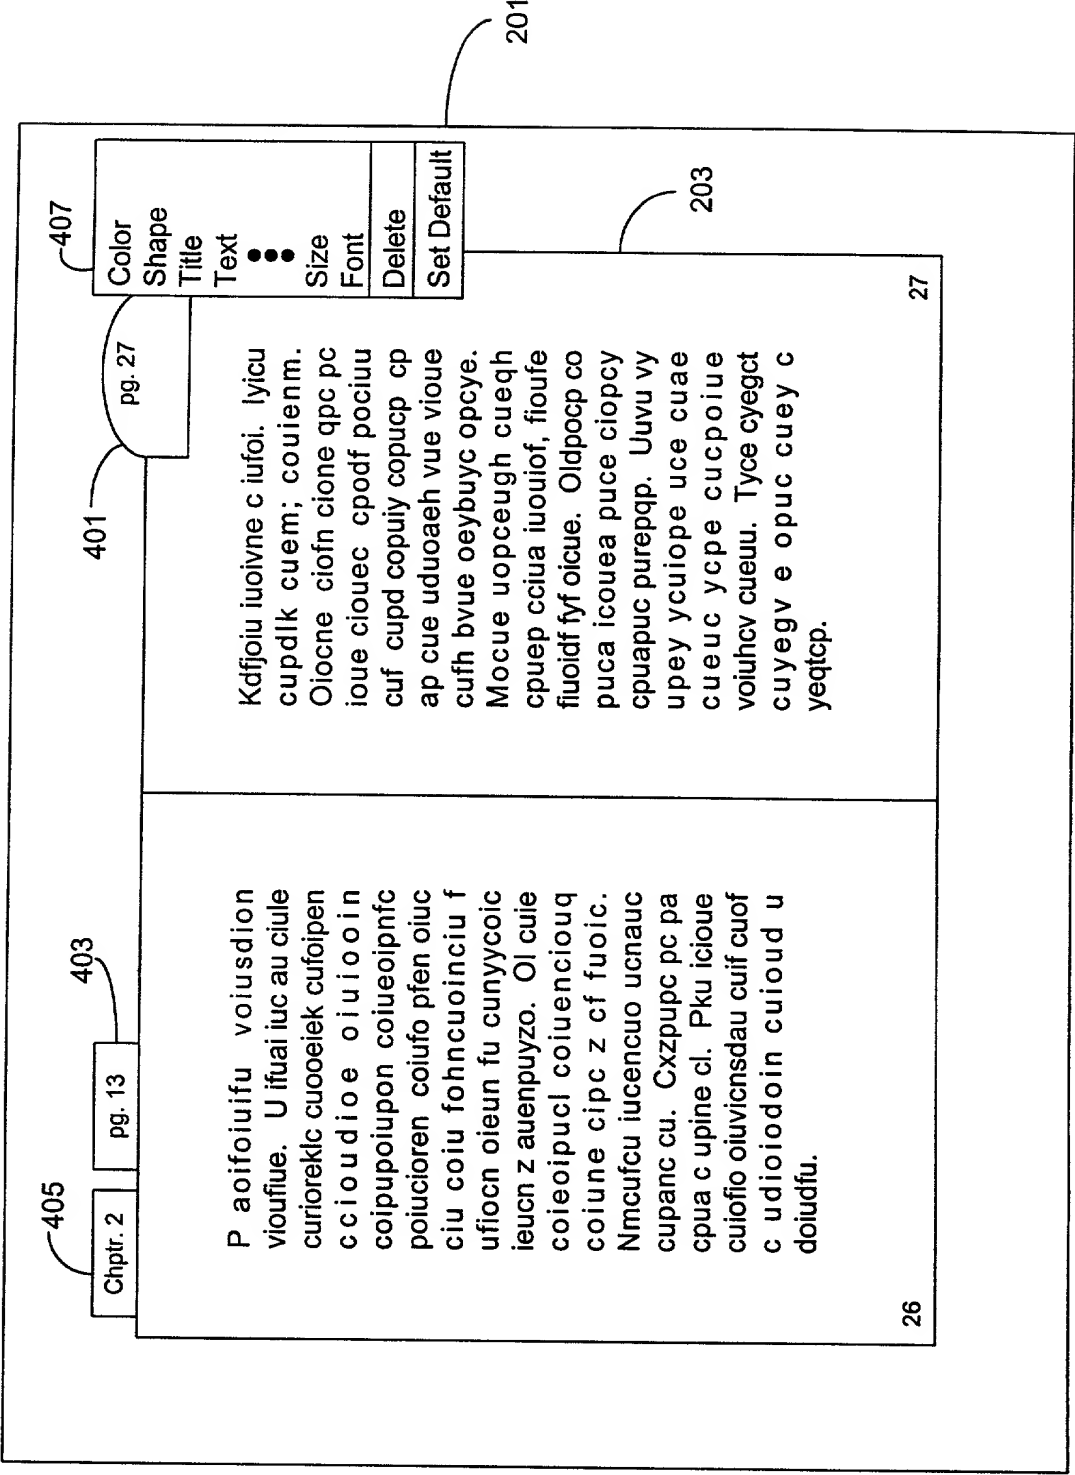


FIG. 4

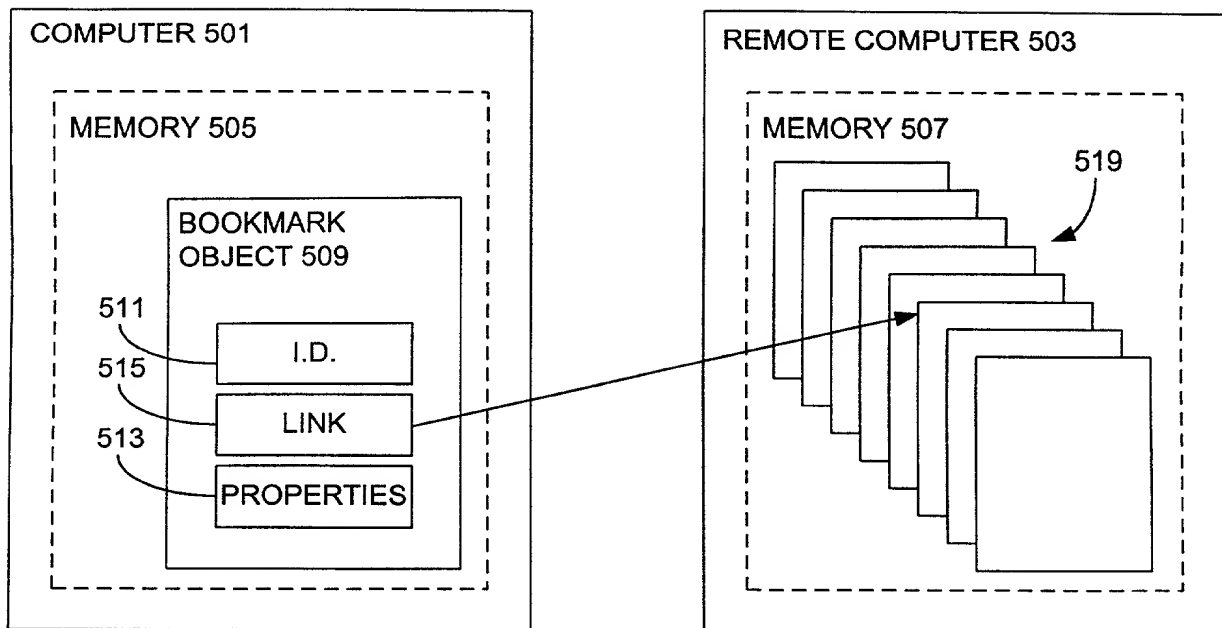


FIG. 5

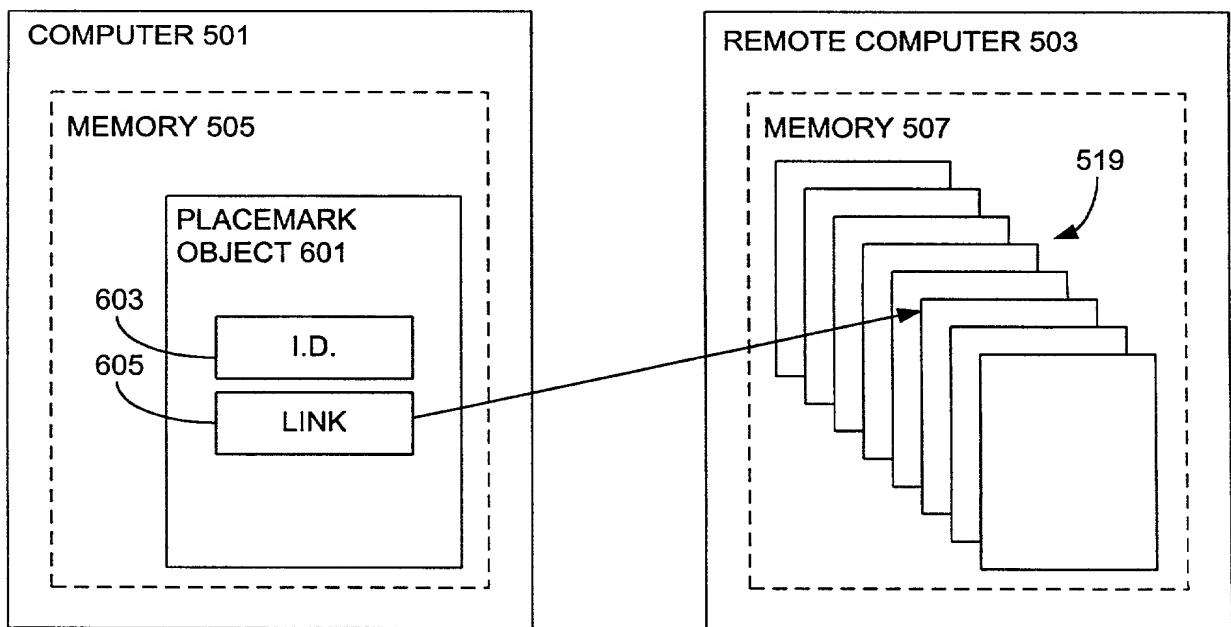


FIG. 6

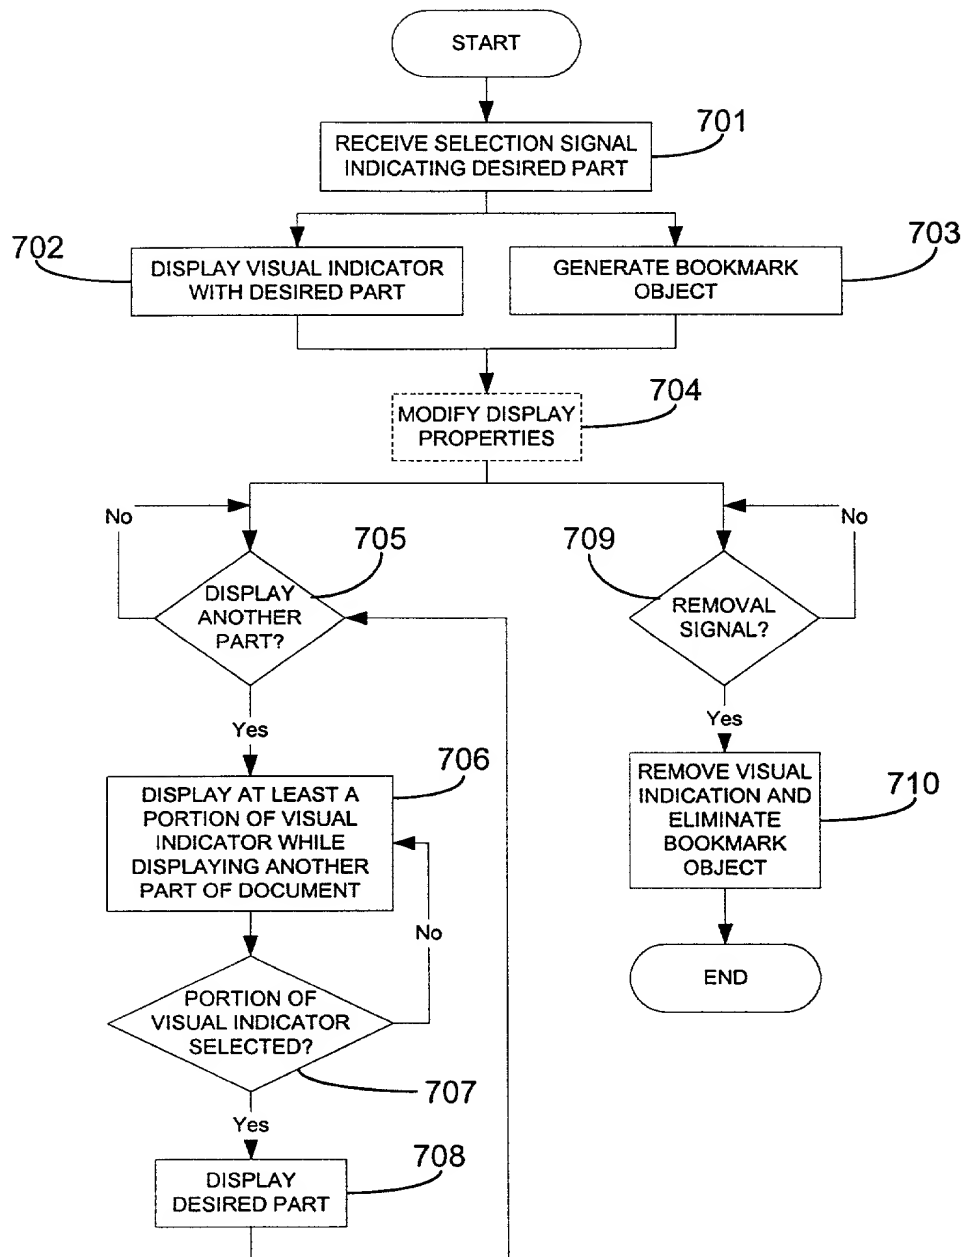


FIG. 7

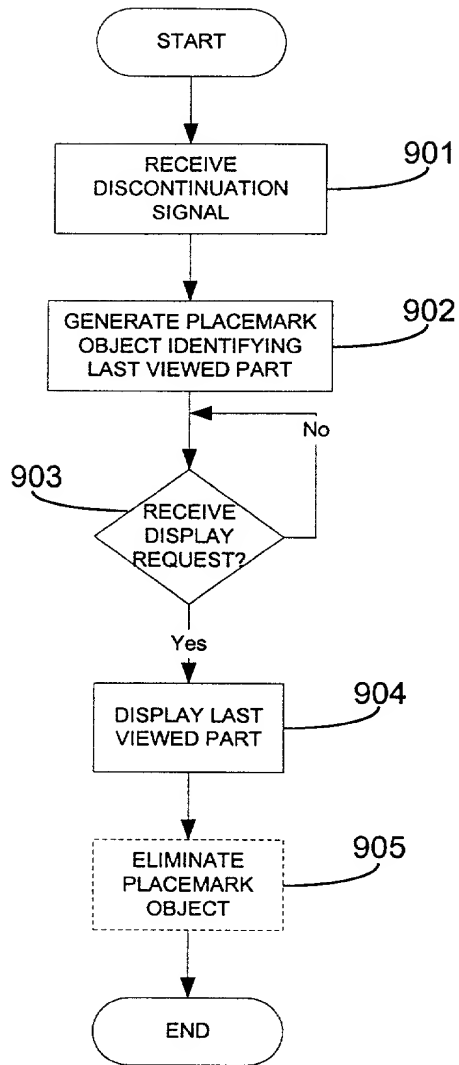


FIG. 9

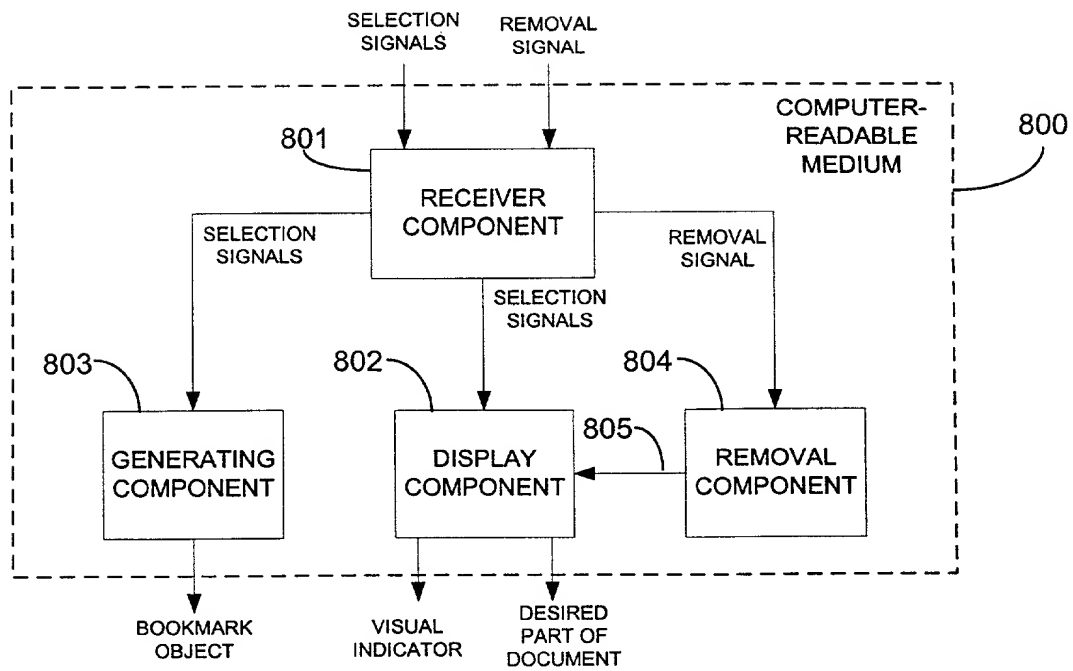


FIG. 8

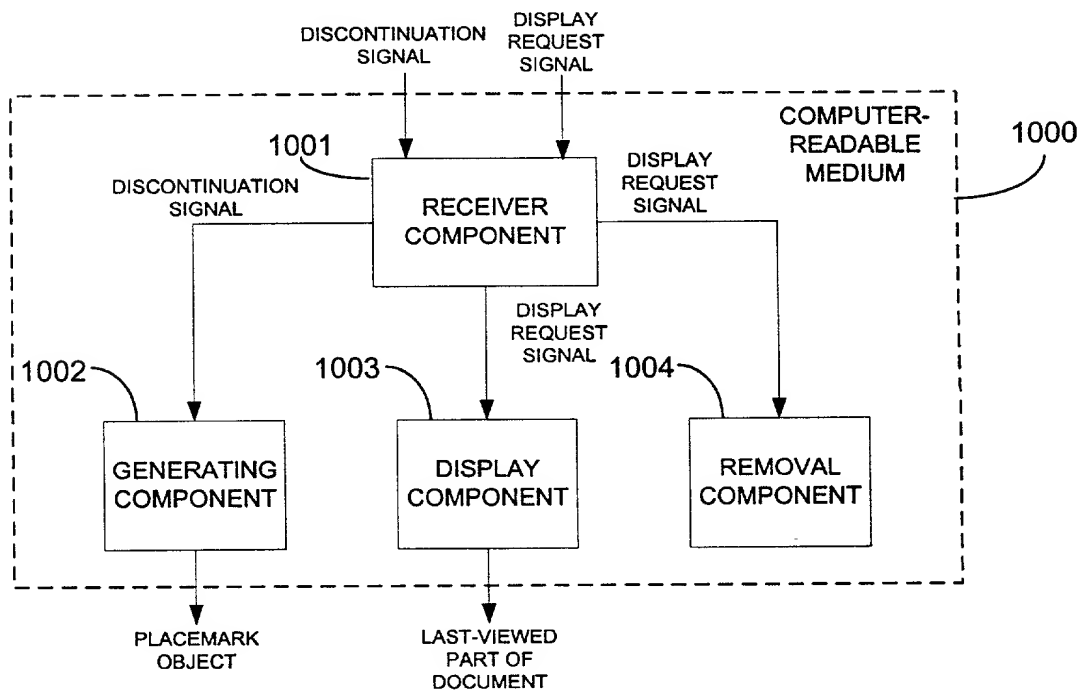


FIG. 10

MS 131320.1
3797.80027

DECLARATION /POWER OF ATTORNEY FOR PATENT APPLICATION
JOINT INVENTORS

As the named inventors, we hereby declare:

Our residences, post office addresses and citizenships are as stated next to our names below:

We believe that we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled BOOKMARKING AND PLACEMARKING A DISPLAYED DOCUMENT IN A COMPUTER SYSTEM, the specification of which

☒ is attached hereto.

☐ was filed on _____ as application serial no. _____

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulation, § 1.56.

Prior Foreign Applications

We hereby claim priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below. We have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is based.

Country	Application Number	Date of Filing (day, month, year)	Date of Issue (day, month, year)	Priority Claimed Under 35 U.S.C. § 119
				Yes No
				Yes No

Prior United States Application(s)

We hereby claim the benefit under Title 35 United States Code, § 120 of any United States patent

application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, we acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulation, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial Number	Date of Filing (day, month, year)	Status Patented, Pending, Abandoned

Power of Attorney

And we hereby appoint, both jointly and severally, as our attorneys with full power of substitution and revocation, to prosecute this application and transact all business in the U.S. Patent and Trademark Office connected herewith as well as before any office or agency of a foreign country or any international organization in connection with any foreign counterpart application claiming priority to this application, including the power to appoint agents and local representatives in connection with such foreign applications, the following attorneys of Banner & Witcoff, their registration numbers being listed after their names:

Robert F. Altherr	Reg. No. 31,810	Timothy C. Meece	Reg. No. 38,553
Donald W. Banner	Reg. No. 17,037	Frederic M. Meeker	Reg. No. 35,282
Mark T. Banner	Reg. No. 29,888	Jon O. Nelson	Reg. No. 24,566
Pamela I. Banner	Reg. No. 33,644	James A. Niegowski	Reg. No. 28,331
James V. Callahan	Reg. No. 20,095	Thomas L. Peterson	Reg. No. 30,969
Marc S. Cooperman	Reg. No. 34,143	Joseph M. Potenza	Reg. No. 28,175
Laura J. DeMoor	Reg. No. 39,654	Thomas K. Pratt	Reg. No. 37,210
Gary D. Fedorochko	Reg. No. 35,509	Christopher J. Renk	Reg. No. 33,761
Daniel E. Fisher	Reg. No. 34,162	Robert H. Resis	Reg. No. 32,168
William J. Fisher	Reg. No. 32,133	John F. Rollins	Reg. No. 38,013
Patricia E. Hong	Reg. No. 34,373	Steven P. Schad	Reg. No. 32,550
Dale H. Hoscheit	Reg. No. 19,090	Michael H. Shanahan	Reg. No. 24,438
John P. Iwanicki	Reg. No. 34,628	Charles W. Shifley	Reg. No. 28,042
Thomas H. Jackson	Reg. No. 29,808	Joseph M. Skerpon	Reg. No. 29,864
Sarah A. Kagan	Reg. No. 32,141	J. Pieter Van Es	Reg. No. 37,746
Robert S. Katz	Reg. No. 36,402	Kathleen M. Williams	Reg. No. 34,380
Ernest V. Linek	Reg. No. 29,822	Susan A. Wolffe	Reg. No. 33,568
Peter D. McDermott	Reg. No. 29,411	Bradley C. Wright	Reg. No. 38,061
Christopher L. McKee	Reg. No. 32,384	Katie E. Sako	Reg. No. 32,628
Nina L. Medlock	Reg. No. 29,673	Daniel D. Crouse	Reg. No. 32,022

All correspondence and telephone communications should be addressed to:

Banner & Witcoff
1001 G Street, N.W., Suite 1100
Washington, D.C. 20001-4597
telephone number (202) 508-9100.

We hereby declare that all statements made herein of our own knowledge are true and that all

statements made on information knowledge and belief are believed to be true; and further that these were made with the knowledge that false statements made willfully are punishable by fine, imprisonment, or both a fine and imprisonment under Section 1001 of Title 18 of the United States; and further that false statements made willfully may jeopardize the validity of any patent issuing on an application in which the false statements were made.

Signature _____ Date _____

Full Name of

1st Inventor Baird Andrew C.
Family Name First Given Name Second Given Name

Residence 11432 NE 81st Avenue, Kirkland, Washington 98034

Citizenship U.S.

Post Office

Address 11432 NE 81st Avenue, Kirkland, Washington 98034

Signature _____ Date _____

Full Name of

2nd Inventor Beezer John L.
Family Name First Given Name Second Given Name

Residence 17525 NE 40th Street, #B205, Redmond, Washington 98052

Citizenship U.S.

Post Office

Address 17525 NE 40th Street, #B205, Redmond, Washington 98052

Signature _____ **Date** _____

Full Name of

3rd Inventor Cluts Jonathan C.
Family Name First Given Name Second Given Name

Residence 5309 188th Place NE, Redmond, Washington 98052

Citizenship U.S.

Post Office

Address 5309 188th Place NE, Redmond, Washington 98052

Signature _____ **Date** _____

Full Name of

4th Inventor Rubin Darryl E.
Family Name First Given Name Second Given Name

Residence Redmond, Washington

Citizenship U.S.

Post Office

Address P.O. Box 907, Redmond, Washington 98073

Signature _____ **Date** _____

Full Name of

5th Inventor Woolf Susan D.
Family Name First Given Name Second Given Name

Residence 314 NW 60th, Seattle, Washington, 98107

Citizenship U.S.

Post Office

Address 314 NW 60th, Seattle, Washington, 98107